



MAKE IT LAST.

CATALOGUE



WHY PROFESSIONALS CHOOSE SENCO



WE ARE
**EXPERTS IN
FASTENING**



WE ARE
**A FULL SOLUTION
SUPPLIER**



WE OFFER
**RELIABLE TOOLS &
QUALITY FASTENERS**

With SENCO, we aim to work as one team with our customers and end-users to provide the best services, workflows and products.



MAKE IT LAST.

Table of Contents

STRIPNAILERS	4
Brad Nailers	5
Finish Nailers	8
Framing Nailers	10
COIL NAILERS	12
STAPLERS	16
Light Wire Staplers	17
Medium Wire Staplers	18
Heavy Wire Staplers	20
SPECIALS	22
COMPRESSORS	26
Low Noise	27
SemiPro	32
ACCESSORIES	36
AUTO-FEED SCREWDRIVERS	38
FASTENER SPECIFICATIONS	42
Stripnails	43
Pins	43
Brads	43
DA	44
Clipped Head	45
Coil Nails	46
Staples	49
Light Wire Staples	49
Medium Wire Staples	51
Heavy Wire Staples	52
Other	54
Concrete pins	54
T-nails	54
Fencing Staples	55
Rebar Wire	55
Collated Screws	55



MAKE IT LAST.

STRIPNAILERS

YOU HIT THE NAIL ON THE HEAD PERFECTLY WITH SENCO

Our strip nailing tools allow you to work quickly and efficiently without compromising on quality or durability. In addition, our tools are easy to handle and maintain, allowing you to spend more time on your work and less time on repairs and maintenance.

TECHNICAL EXPLANATION ACTIVATION

Trigger Fire (TF)

Trigger fire is also known as single-shot operation. By placing the tool nose on the work surface and then pressing the trigger, the machine is triggered and the fastener is shot into the material. For the next shot, the machine nose should be removed from the work surface again and the above repeated.

Bottom Fire (BF)

Bottom fire is also known as contact actuation. The trigger is held down and pressing the nose onto the work surface activates the tool and shoots the fastener directly into the material. This can be repeated by holding down the trigger and immediately pressing the nose onto the material again.

F-16XP

BRAD NAILER 1.6MM



FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth-of-drive
- 18V Li-ion battery
- Selectable trigger

0°

APPLICATIONS

Molding and decorative trim, furniture trim, window beading, blind pinning of upholstered and trim panels, rattan, scribe molding, cabinets, drawers and picture frame assembly

GT65i-RH

GAS BRAD NAILER 1.6MM



FEATURES

- High-voltage ignition
- Consistent drives in all weather conditions
- Depth-of-drive adjustment
- EZ-Clear Nose

20°

APPLICATIONS

Finish and trim, baseboard, cabinets, decorative trim, furniture trim, door & window casing

F-18XP

BRAD NAILER 1.2MM



FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth-of-drive
- 18V Li-ion battery
- Selectable trigger

0°

APPLICATIONS

Molding and decorative trim, furniture trim, window beading, blind pinning of upholstered and trim panels, rattan, scribe molding, cabinets, drawers and picture frame assembly

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	F-16XP	GT65i-RH	F-18XP
Weight	3.0 kg	2.2 kg	3.1 kg
Magazine Capacity	110	100	110
Actuation	BF/TF	TF	BF/TF
Battery	18 V Li-Ion	7.2 V 2.5 Ah Li-Ion	18 V Li-Ion
Recharge Time 100%	45 min	120 min	45 min
Fuel Cell	-	18g (31.5x80 mm)	-

NON-TECHNICAL SPECIFICATIONS

Warranty	2 years	2 years	2 years
Art. Nr.	10N2001N(1bat), 10N2501N(2bat)	9VS2001N	10M2001N(1bat), 10M2501N(2bat)

FASTENER SPECIFICATIONS

	see p. 44	see p. 44	see p. 43
Range	19-65 mm	32-65 mm	15-55 mm
Shank	1.6	1.6	1.2
Series	RX	RH	AX

FinishPro10
MICRO PINNER 0.6MM



- FEATURES**
- Rear exhaust
 - Adjustable depth-of-drive
 - Reload indicator
 - Extra powerful
 - Magazine bumper pad



APPLICATIONS
Mouldings, glazing beads, furniture decoration, cabinets and drawers, rattan furniture

S200BN
BRAD NAILER 1.2MM



- FEATURES**
- Adjustable depth-of-drive
 - EZ-Clear Nose
 - Comfort grip
 - Adjustable exhaust
 - Reload indicator



APPLICATIONS
Mouldings, trim, furniture decoration, glazing beads, cupboards and drawers, general finishing

FinishPro18Mg
BRAD NAILER 1.2MM



- FEATURES**
- Magnesium body
 - Oil-free
 - Adjustable depth-of-drive
 - Selectable trigger
 - Comfort grip



APPLICATIONS
Mouldings, furniture decoration, trim, beading, cabinets and drawers, rattan furniture, finishing

FinishPro16XP
BRAD NAILER 1.6MM



- FEATURES**
- Adjustable depth-of-drive
 - EZ-Clear Nose
 - Rotatable belt hook



APPLICATIONS
Baseboards, cabinets, case goods, chair rail, crown molding, decorative trim, door & window casing, sash and millwork, book shelves and exterior and interior trim

SLP20XP
BRAD NAILER 1.2MM



- FEATURES**
- Oil-free
 - Lightest on the market in its class
 - Easy to maintain
 - EZ-Clear Nose



APPLICATIONS
Mouldings, furniture decoration, glass slats, cabinets and drawer cabinets, rattan furniture, finishing

SLP20XP GLN
GLAZING BRAD NAILER 1.2MM



- FEATURES**
- Oil-free
 - Lightest on the market in its class
 - Easy to maintain
 - EZ-Clear Nose



APPLICATIONS
Window beading, secret nailing

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	FinishPro10	S200BN	FinishPro18Mg
Weight	1,1 kg	1.4 kg	1.1 kg
Magazine Capacity	110	107	110
Actuation	TF	TF	BF/TF
Operating Pressure	4.8-6.5 bar	4.8-8.3 bar	4.8-8.3 bar
Air Inlet	1/4" female NPT	1/4" female NPT	1/4" female NPT
Air Consumption (at 60 shots per minute)	21,6 l/m	21.6 l/m	68 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year	1 year
Art. Nr.	2C2001N	922008N	1U2025N

FASTENER SPECIFICATIONS

	see p. 43	see p. 43	see p. 43
Range	12-25 mm	16-50 mm	16-50 mm
Shank	0.6	1.2	1.2
Series	CZ	AX	AX

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	FinishPro16XP	SLP20XP	SLP20XP GLN
Weight	1.9 kg	1.0 kg	1.17 kg
Magazine Capacity	110	110	110
Actuation	BF/TF	TF	TF
Operating Pressure	4.8-8.3 bar	4.8-8.3 bar	4.8-8.3 bar
Air Inlet	1/4" female NPT	1/4" female NPT	1/4" female NPT
Air Consumption (at 60 shots per minute)	60 l/m	52.7 l/m	54 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	5 years	5 years	5 years
Art. Nr.	9S2001N	432001N	WCE0472

FASTENER SPECIFICATIONS

	see p. 44	see p. 43	see p. 43
Range	32-65 mm	16-41 mm	25-38 mm
Shank	1.6	1.2	1.2
Series	RX	AX	AX

STRIPNAILERS FINISH

F-15XP FINISH NAILER 1.8MM



FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth-of-drive
- 18V Li-ion battery
- Selectable trigger

34°

APPLICATIONS

Finish and trim, baseboard, cabinets, caskets, chair rail, decorative trim, door & window casing, furniture trim, paneling

GT65i-DA GAS FINISH NAILER 1.8MM



FEATURES

- High-voltage ignition
- Depth-of-drive adjustment
- EZ-Clear Nose
- Consistent drives in all weather conditions

34°

APPLICATIONS

Finish and trim, baseboard, cabinets, caskets, chair rail, decorative trim, furniture trim, paneling, door & window casing

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	F-15XP	GT65i-DA
Weight	3.1 kg	2.32 kg
Magazine Capacity	110 pieces	110
Actuation	BF/TF	TF
Battery	18 V Li-Ion	7.2 V 2.5 Ah Li-Ion
Recharge Time 100%	45 min	120 min
Fuel Cell	-	18g (31.5x80 mm)

NON-TECHNICAL SPECIFICATIONS

Warranty	2 years	2 years
Art. Nr.	10L2001N(1bat), 10L2501N(2bat)	5VS2001N

FASTENER SPECIFICATIONS

	see p. 44	see p. 44
Range	32-64 mm	32-64 mm
Shank	1.8	1.8
Series	DA	DA

FINISH STRIPNAILERS

FinishPro35BL FINISH NAILER



FEATURES

- Adjustable dept of drive
- Comfort grip
- No mar pad
- Rotatable exhaust cover

34°

APPLICATIONS

Baseboards, cabinets, case goods, caskets, chair rails, decorative trim, door and window casing, sash and millwork, exterior trim, finish applications/trim, furniture, and paneling

FinishPro35Mg FINISH NAILER



FEATURES

- Adjustable depth-of-drive
- EZ-Clear Nose
- 360° adjustable exhaust
- Comfort grip

34°

APPLICATIONS

Baseboards, cabinets, frames, door & window frames, skirting boards, exterior trim, furniture manufacture, dado & architrave

FinishPro30XP FINISH NAILER



FEATURES

- Light weight – 1,73kg
- NeverLube® design
- Belt hook – attached to either side
- Adjustable depth-of-drive
- EZ-Clear™ latch

34°

APPLICATIONS

Baseboards, cabinets, case goods, caskets, chair rails, decorative trim, door & window casing, sash & millwork, exterior trim, finish applications/trim, furniture and paneling

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	FinishPro35BL	FinishPro35Mg	FinishPro30XP
Weight	2.08 kg	1.1 kg	1.73 kg
Magazine Capacity	100	110	104
Actuation	TF	BF/TF	BF/TF
Operating Pressure	4.8-8.3 bar	4.8-8.3 bar	4.8-8.3 bar
Air Inlet	1/4" female NPT	1/4" female NPT	1/4" female NPT
Air Consumption (at 60 shots per minute)	61.2 l/m	90.6 l/m	61.2 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year	5 years
Art. Nr.	TN52PIBL	6G2001N	9P2002N

FASTENER SPECIFICATIONS

	see p. 44	see p. 44	see p. 44
Range	32-63 mm	32-65 mm	25-50 mm
Shank	1.8	1.8	1.8
Series	DA	DA	DA

F-35XP
FRAMING NAILER



FEATURES

- Fusion cordless air-power technology
- Selectable trigger options
- Dry fire lockout
- Tool free depth-of-drive adjustor

34°

APPLICATIONS

Framing, panelized construction, truss building, subflooring, sheathing, decking, siding, fencing, pallets and crate assembly

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	F-35XP	SGT90i
Weight	5.16 kg	3.6 kg
Magazine Capacity	60	70
Actuation	BF/TF	TF
Battery	18 V 3 Ah Li-Ion	7.2 V 2.5 Ah Li-Ion
Recharge Time 100%	60 min	120 min
Fuel Cell	-	40g (31.5x165 mm)

NON-TECHNICAL SPECIFICATIONS

Warranty	2 years	2 years
Art. Nr.	10G2001N	4VS2001N

FASTENER SPECIFICATIONS

	see p. 45-46	see p. 45-46
Range	50-90 mm	50-90 mm
Shank	2.9-3.8 mm	2.9-3.3 mm
Series	GC - GE - HC - HE	GC - GE - HC - HE

FramePro601
CLIPPED HEAD NAILER



FEATURES

- Lightweight and powerful
- Toolless depth-of-drive
- 360° adjustable exhaust
- Nose with sawtooth for more grip
- Shorter straight-line magazine

34°

APPLICATIONS

Timber frame constructions, framing, sub-floors, pallets and crates, decking, roofs, fencing, door and window frames

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	FramePro601	FramePro651
Weight	3.62 kg	3.81 kg
Magazine Capacity	70	70
Actuation	BF/TF	BF/TF
Operating Pressure	4.8-8.3 bar	4.8-8.3 bar
Air Inlet	3/8" female NPT	3/8" female NPT
Air Consumption (at 60 shots per minute)	283.2 l/m	311.5 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year
Art. Nr.	1G2101N	2G2121N

FASTENER SPECIFICATIONS

	see p. 45-46	see p. 45-46
Range	50-90 mm	50-100 mm
Shank	2.9-3.3 mm	2.9-3.3 mm
Series	GC - GE - HC - HE	GC - GE - HC - HE

SGT90i
GAS FRAMING NAILER



FEATURES

- Cordless convenience
- High-voltage ignition
- Consistent drives in all weather conditions
- Durable metal magazine

34°

APPLICATIONS

Truss building, framing, sub-flooring, sheathing and decks. Other applications include crate and box assembly, pallet making and fencing

FramePro651
CLIPPER HEAD NAILER



FEATURES

- Extra powerful
- Adjustable depth-of-drive
- 360° adjustable exhaust
- Nose with sawtooth for more grip
- Shorter straight-line magazine

34°

APPLICATIONS

Timber frame constructions, framing, sub-floors, pallets and crates, decking, roofs, fencing, door and window frames

COIL NAILERS

THE POWERFUL BOOST YOU NEED

Discover SENC0's diverse range of coil nailers. Our tools, combined with SENC0 fasteners, are great for fixing shingles, walls, cladding and subfloors.



COIL NAILERS

S65CNP COIL NAILER



FEATURES

- Magnesium body
- Comfort grip
- Multi-directional exhaust deflector
- Adjustable depth-of-drive
- Runs both wire and plastic collated nails

15°

APPLICATIONS

Wall sheathing/siding, timber frame constructions, fencing, sub-flooring, boarding and other wooden assembly work

CoilPro50 COIL NAILER



FEATURES

- Well balanced and lightweight
- Selectable trigger
- Adjustable depth-of-drive
- Highest power/weight ratio in its class

15°

APPLICATIONS

Pallets and crates, gate and fence construction, underlay, garden products, cladding

CoilPro90 COIL NAILER



FEATURES

- Well balanced and lightweight
- Nose with sawtooth for more grip
- Selectable trigger
- Adjustable depth-of-drive

15°

APPLICATIONS

Timber frame constructions, subfloors, pallets and crates, decking, roofs, cladding

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	S65CNP	CoilPro50	CoilPro90
Weight	2.49 kg	2.0 kg	3.27 kg
Magazine Capacity	275	300	150-300
Actuation	TF	BF/TF	BF/TF
Operating Pressure	4.8-8.3 bar	4.8-8.3 bar	4.8-8.3 bar
Air Inlet	1/4" female NPT	1/4" female NPT	3/8" female NPT
Air Consumption (at 60 shots per minute)	220 l/m	83.16 l/m	157 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year	1 year
Art. Nr.	8G2001N	4U2001N	1VS2001N

FASTENER SPECIFICATIONS

	see p. 46-47	see p. 46-47	see p. 46-47
Range	32-65 mm	32-50 mm	45-90 mm
Shank	2.3-2.9 mm	2.1-2.3 mm	2.5-3.3 mm
Series	ED, BJ, GD	SC, ED, SE, EL, SG, SS, BS	BJ, GD, HD, KD, BL, GL, HL, KL, HK

COIL NAILERS

SCN49XP COIL NAILER



FEATURES

- Selectable trigger
- Adjustable depth-of-drive
- Well balanced and lightweight
- Drives wire and plastic collated flat coilnails

15°

APPLICATIONS

Cladding, underlayment, garden products, pallets and crates, gate and fence construction

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	SCN49XP	SCN65XP
Weight	2.31 kg	3.6 kg
Magazine Capacity	375	275
Actuation	BF/TF	BF/TF
Operating Pressure	5-8.3 bar	4.8-8.3 bar
Air Inlet	3/8" female NPT	3/8" female NPT
Air Consumption (at 60 shots per minute)	111 l/m	270.2 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	5 years	5 years
Art. Nr.	5J2001N	542001N

FASTENER SPECIFICATIONS

	see p. 46-47	see p. 46-47
Range	32-65 mm	50-90 mm
Shank	2.1-2.9 mm	2.5-3.1 mm
Series	SC, ED, GD, SE, BL, BS, EL, GL, BK	BD, GD, HD, KD, BL, BS, GL, HL, BK, HK

SCN65XP COIL NAILER



FEATURES

- Highest power-to-weight ratio in its class
- Adjustable depth-of-drive
- High firing rate means high productivity
- EZ-load design saves time

15°

APPLICATIONS

Cladding, underlayment, garden products, pallets and crates, gate and fence construction



MAKE IT LAST.

SENCO.EU



MAKE IT LAST.

STAPLERS

SENCO - THE BEST SOLUTION

We understand that every job is different, which is why we offer staplers in different categories to meet your specific needs. SENCO has compact, lightweight staplers for simple tasks, as well as robust, powerful staplers for heavier projects.



LIGHT WIRE STAPLERS

SFW05 LIGHT WIRE STAPLER



21_{GA} 22_{GA}

FEATURES

- Slim, compact design for use in small spaces
- Adjustable exhaust
- Lightweight

APPLICATIONS

Upholstering operations, furniture assembly, cabinets, automotive, bedding, molding and roofing felt

Models

Crown	Ga	Staple	Description	Art. Nr.
12.7	21	AT	TF	SFW05-AT
12.7	22	B	TF	SFW05-B
9.5	22	C	TF	SFW05-C

SFW09 LIGHT WIRE STAPLER



20_{GA} 21_{GA} 22_{GA}

FEATURES

- Long 25mm lip
- Rounded steel cap
- Rear exhaust
- Rear magazine bumper

APPLICATIONS

Upholstering operations, furniture assembly, cabinets, automotive, bedding, molding and roofing felt

Models

Crown	Ga	Staple	Description	Art. Nr.
12.7	21	AT	TF	4C2021N
9.5	22	C	TF	4C2001N
12.7	20	F	TF	4C2041N

SFT10XP LIGHT WIRE STAPLER



20_{GA} 21_{GA} 22_{GA}

FEATURES

- One-handed magazine opening
- Rear exhaust
- Comfort grip
- Short trigger stroke

APPLICATIONS

Furniture assembly, cabinets, automotive, bedding, molding and roofing felt

Models

Crown	Ga	Staple	Description	Art. Nr.
4.8	22	A/D	TF	6S2001N
12.7	22	B	TF	6S2011N
9.5	22	C	TF	6S2021N
9.5	22	C	long nose	6S2421N
12.7	20	F	TF	6S2041N
12.7	21	AT	TF	6S2061N

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	SFW05	SFW09	SFT10XP
Weight	0.90 kg	0.95 kg	1.0 kg
Magazine Capacity	100	157	180
Actuation	TF	TF	TF
Operating Pressure	5.2-6.9 bar	4.1-6.5 bar	4.1-6.5 bar
Air Inlet	1/4" female NPT	1/4" female NPT	1/4" female NPT
Air Consumption (at 60 shots per minute)	27 l/m	21.8 l/m	23 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year	5 years
Art. Nr.	see tabel	see tabel	see tabel

FASTENER SPECIFICATIONS

	see p. 49-50	see p. 49-50	see p. 49-50
Length	6-16 mm	6-16 mm	4-16 mm
Crown	9.5 12.7	9.5 12.7	4.8 9.5 12.7
Series	AT, B, C	AT, C, F	A/D, AT, B, C, F

S150LS
MEDIUM WIRE STAPLER



- FEATURES**
- Adjustable depth-of-drive
 - Comfort grip
 - Reload indicator

18_{GA}

APPLICATIONS
Cabinets, furniture, drawer assembly, case backs, picture frames

SLS18Mg
MEDIUM WIRE STAPLER



- FEATURES**
- Magnesium body
 - Oil-free
 - Adjustable depth-of-drive
 - Selectable trigger
 - Comfort grip

18_{GA}

APPLICATIONS
Cabinets, furniture, drawer assembly, case backs, picture frames

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	S150LS	SLS18Mg
Weight	1.46 kg	1.17 kg
Magazine Capacity	100	110
Actuation	TF	BF/TF
Operating Pressure	4.8-8.3 bar	4.8-8.3 bar
Air Inlet	1/4" female NPT	1/4" female NPT
Air Consumption (at 60 shots per minute)	54.4 l/m	68 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year
Art. Nr.	952008N	1W2025N

FASTENER SPECIFICATIONS

	see p. 51	see p. 51
Length	12.7-38 mm	9.5-38 mm
Crown	6.4 mm	6.4 mm
Series	L	L

SLS20XP
MEDIUM WIRE STAPLER



- FEATURES**
- Oil-free
 - Lightweight
 - Ergonomic design
 - No-Mar pad
 - Depth adjustment

18_{GA}

APPLICATIONS
Furniture, cabinets, paneling, upholstery, siding, fencing

SKSXP
MEDIUM WIRE STAPLER



- FEATURES**
- Oil-free
 - Lightweight
 - Low maintenance
 - Only 2 moving O-rings
 - Long 25mm lip to get into tight spots

18_{GA}

APPLICATIONS
Furniture, cabinets, paneling, upholstery, sidings, doors & window casings

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	SLS20XP	SKSXP
Weight	1.13 kg	1.9 kg
Magazine Capacity	168	145
Actuation	BF/TF	BF/TF
Operating Pressure	4.8-8.3 bar	4.8-8.3 bar
Air Inlet	1/4" female NPT	1/4" female NPT
Air Consumption (at 60 shots per minute)	54.4 l/m	61.2 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	5 years	5 years
Art. Nr.	492023N(-L), 492024N(-M)	302020N(-L), 302052N(-M)

FASTENER SPECIFICATIONS

	see p. 51	see p. 51
Length	13-25 mm	19-38 mm
Crown	6.4 9.5	6.4 9.5
Series	L, M	L, M

SNS41
HEAVY WIRE STAPLER



NS20XP
HEAVY WIRE STAPLER



FEATURES

- Durable design
- Adjustable depth-of-drive
- 360° adjustable exhaust
- EZ-Clear Nose
- Reload indicator

16_{GA}

FEATURES

- 15% more powerful than all other construction staplers in its class
- Rotatable belt hook
- EZ-Clear latch
- New drive track design

16_{GA}

APPLICATIONS

Framework, sub-floors, sheathing, furniture framing, pallets, ramps and gates, crates, fascia & soffits

APPLICATIONS

Sheathing, furniture framing, roof decking, subflooring, crate and box assembly, pallets, cedar shingles, furring, metal tie-down straps, fascia and soffits, and ridge beam assembly

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	SNS41	NS20XP
Weight	2.1 kg	2.3 kg
Magazine Capacity	160	160
Actuation	BF/TF	BF/TF
Operating Pressure	5.5-8.3 bar	4.8-8.3 bar
Air Inlet	1/4" female NPT	3/8" female NPT
Air Consumption (at 60 shots per minute)	153 l/m	113 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	5 years
Art. Nr.	3L2003N	9X2001N

FASTENER SPECIFICATIONS

	see p. 52	see p. 52
Length	25-50 mm	25-50 mm
Crown	10.6 11.1	10.6 11.1
Series	N, O	N, O

PS15XP
HEAVY WIRE STAPLER



FEATURES

- EZ-Clear latch
- Adjustable depth-of-drive
- Rotatable belt hook
- New drive track design

16_{GA}

APPLICATIONS

Wire lathing, foam insulation board, furniture, cabinet frames, butt-joints, and corrugated carton to skid

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	PS15XP	SQS5XP
Weight	2.3 kg	2.7 kg
Magazine Capacity	160	130
Actuation	BF/TF	BF/TF
Operating Pressure	4.8-8.3 bar	5.5-8.3 bar
Air Inlet	3/8" female NPT	3/8" female NPT
Air Consumption (at 60 shots per minute)	90 l/m	185 l/m

NON-TECHNICAL SPECIFICATIONS

Warranty	5 years	5 years
Art. Nr.	9T2001N	662001N

FASTENER SPECIFICATIONS

Length	16-38 mm	32-63 mm
Crown	25.4	11.2
Series	P	Q

SPECIAL TOOLS

From concrete nails to braid wire, our special tools offer reliable solutions for the most demanding jobs. SENCO tools for special applications are built built to work quickly and efficiently, offering durability and reliable fastening.

GT40i-SCP GAS CONCRETE NAILER



FEATURES

- Cordless convenience
- Powerful motor
- Consistent drives in all weather conditions
- Tool-free depth-of-drive adjustment



APPLICATIONS

Fastening of drywall track, wood furring, hat channel, ceiling grid to concrete, concrete block and steel

GT40FS GAS FENCING STAPLER



FEATURES

- Cordless convenience
- Powerful motor
- Consistent drives in all weather conditions
- Tool-free depth-of-drive



APPLICATIONS

Fencing, agriculture, gardening, wire-to-wood stapling

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	GT40i-SCP	GT40FS
Weight	3.8 kg	3.73 kg
Magazine Capacity	20	78
Actuation	TF	TF
Battery	7.2 V 2.5 Ah Li-Ion	6V 1,5 Ah Ni-MH
Recharge Time 100%	120 min	120 min
Fuel Cell	40g (31.5x165 mm)	40g (31.5x165 mm)

NON-TECHNICAL SPECIFICATIONS

Warranty	2 years	2 years
Art. Nr.	15VS2001N	3VS2002N

FASTENER SPECIFICATIONS

Length	15-40 mm	25-40 mm
Shank/Crown	2.7-3.0	3.1
Series	SCP	3IFS

TPRO65
T-NAILER



FEATURES

- Strong and lightweight body
- Special hardened driver blade
- 360° adjustable exhaust
- Drives into concrete, steel & wood



APPLICATIONS

Trackless carpet strip, wood furring, floor underlayment, installation of metal drywall track

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	TPRO65	SHT-F
Weight	2.71 kg	1.1 kg
Magazine Capacity	80	-
Actuation	BF/TF	-
Operating Pressure	4.9-8.4 bar	-
Air Inlet	1/4" female NPT	-
Air Consumption (at 60 shots per minute)	87.8 l/m	-

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year
Art. Nr.	1VS2002N	6R2001N

FASTENER SPECIFICATIONS

	see p. 54	see p. 50
Length	18-64 mm	6-10 mm
Shank/Crown	2.2	12.7
Series	PH	F

SHT-F
HAMMERTACKER



FEATURES

- Durable construction
- Comfortable anti-slip grip
- Quick loading

APPLICATIONS

Upholstery, installing insulation, carpet and underlayment, plastic

SRT40
REBAR TYING TOOL



FEATURES

- Consistent and strong tying
- Longer life thanks to brushless motors
- Long operating time with Li-Ion 18V-4 Ah battery

APPLICATIONS

Tying of rebar in concrete applications and underfloor heating

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	SRT40
Weight	2.6 kg
Magazine Capacity	-
Actuation	TF
Battery	18 V 4 Ah Li-Ion
Recharge Time 100%	90 min
Fuel Cell	-

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year
Art. Nr.	9VS2002N

FASTENER SPECIFICATIONS

	see p. 55
Series	08A40
Description	SENCO rebar tying wire 0,8 mm EZ 95m 40 pieces per box

SAY GOODBYE TO
MANUAL TYING AND
**SAVE TIME
AND ENERGY**





MAKE IT LAST.

COMPRESSORS

PNEUMATIC POWER

Our Low Noise range is specially designed for quiet operation without compromising on power. Whether you are finishing interiors, fixing skirting boards or assembling furniture. Our SemiPro range is designed for the less intensive user looking for reliable, powerful performance.



LOW NOISE COMPRESSORS

AC4504, FIP18 STARTERKIT



FEATURES

- All-in-one set: ready for use
- Low noise compressor
- FinishPro18Mg brad nailer
- Blister pack of brads
- 5m PU hose with connections

APPLICATIONS

Brad nailers, light & medium staplers

AC4504 LOW NOISE COMPRESSOR



FEATURES

- Convenient carrying handle
- Suction feet for good stability
- Universal air coupling

APPLICATIONS

Brad nailers, light & medium staplers

AC8305 LOW NOISE COMPRESSOR



FEATURES

- Convenient carrying handle
- Protective plate
- Suction feet for good stability
- Universal air coupling

APPLICATIONS

Brad nailers, light & medium staplers

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	AC4504, FIP18	AC4504	AC8305
Weight	11 kg	11 kg	14.1 kg
Power	230V / 0.24 kW (0.37 HP)	230V / 0.24 kW (0.37 HP)	230V / 0.35 kW (0.5 HP)
RPM	1420	1420	1400
Tank Capacity	4 l	4 l	5 l
Maximum Pressure	8 bar	8 bar	9 bar
Air Displacement	45 l/m	45 l/m	83 l/m
Airflow (6 bar)	28 l/m	28 l/m	33 l/m
Noise Level (Lpa)	58 dB	58 dB	60 dB

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year	1 year
Art. Nr.	AFN0024KIT	AFN0024	AFN0028

AC10304
LOW NOISE COMPRESSOR



FEATURES

- Convenient carrying handle
- 4 suction feet for good stability
- Universal air coupling

APPLICATIONS

Brad nailers, finish nailers, light & medium staplers

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	AC10304	AC12810
Weight	17.1 kg	25.8 kg
Power	230V / 0.55 kW (0.75 HP)	230V / 0.75 kW (1 HP)
RPM	1400	1420
Tank Capacity	4 l	10 l
Maximum Pressure	9 bar	9 bar
Air Displacement	103 l/m	128 l/m
Airflow (6 bar)	55 l/m	80 l/m
Noise Level (Lpa)	60 dB	65 dB

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year
Art. Nr.	AFN0029	AFN0026

AC12824
LOW NOISE COMPRESSOR



FEATURES

- Wheels and handle for easy transportation
- Horizontal tank for stability
- Simple construction
- Universal air coupling

APPLICATIONS

Stripnailers, coilnailers, brad nailers, finish nailers, light & medium staplers

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	AC12824	AC24016
Weight	22 kg	42.5 kg
Power	230V / 0.75 kW (1 HP)	230V / 1.5 kW (2 HP)
RPM	1420	1400
Tank Capacity	4 l	16 l
Maximum Pressure	9 bar	9 bar
Air Displacement	128 l/m	240 l/m
Airflow (6 bar)	80 l/m	170 l/m
Noise Level (Lpa)	65 dB	72 dB

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year
Art. Nr.	AFN0035	AFN0022

AC24050
LOW NOISE COMPRESSOR



- FEATURES**
- Convenient transport handle
 - Front stand and puncture-proof wheels for high stability
 - Water separator to exhaust dry & clean air
 - Low-speed motor

APPLICATIONS
Stipnailers, coilnailers, brad nailers, finish nailers, light, medium & heavy staplers

AC24080
LOW NOISE COMPRESSOR



- FEATURES**
- Vertical tank
 - Powerful oil-free motor
 - Convenient transportation handle
 - 2 rubber wheels

APPLICATIONS
Stipnailers, coilnailers, brad nailers, finish nailers, light, medium & heavy staplers

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	AC24050	AC24080
Weight	40.5 kg	72.7 kg
Power	230V / 1.5 kW (2 HP)	230V / 1.5 kW (2 HP)
RPM	1400	1400
Tank Capacity	50 l	80 l
Maximum Pressure	9 bar	9 bar
Air Displacement	240 l/m	240 l/m
Airflow (6 bar)	170 l/m	170 l/m
Noise Level (Lpa)	72 dB	72 dB

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year
Art. Nr.	AFN0033	AFN0034

AC32024
LOW NOISE COMPRESSOR



- FEATURES**
- Platform for hose reel
 - Easily visible manometers
 - 2 universal couplings 310/320
 - Foldable handle for easy transportation & lifting
 - Well protected chassis

APPLICATIONS
Stripnailers, coilnailers, brad nailers, finish nailers, light, medium & heavy staplers

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	AC32024	SUB20
Weight	54.0 kg	8 kg
Power	230V / 2.2 kW (3 HP)	-
RPM	1400	-
Tank Capacity	24 l	20 l
Maximum Pressure	10 bar	10 bar
Air Displacement	320 l/m	-
Airflow (6 bar)	230 l/m	-
Noise Level (Lpa)	72 dB	-

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year
Art. Nr.	AFN0031	AFN0027

SUB20
ADDITIONAL COMPRESSED AIR TANK



- FEATURES**
- Additional 20 litres of air storage
 - Longer autonomy before the motor starts to restart (no full stop)

APPLICATIONS
Additional compressed air volume to main compressor

AC19306BL
COMPRESSOR



FEATURES

- Integrated 230V 2-pole motor
- Handle
- High stability
- Horizontal tank
- Universal air couplings

APPLICATIONS

Brad nailers, finish nailers, light & medium staplers

AC20216BL
COMPRESSOR



FEATURES

- Integrated 230V 2-pole motor
- Handle
- High stability
- Horizontal twin-tank
- Universal air couplings

APPLICATIONS

Brad nailers, finish nailers, light & medium staplers

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	AC19306BL	AC20216BL
Weight	15.8 kg	24.0 kg
Power	230V / 1.1 kW (1.5 HP)	230V / 1.5 kW (2 HP)
RPM	2800	2800
Tank Capacity	6 l	16 l
Maximum Pressure	8 bar	9 bar
Air Displacement	193 l/m	202 l/m
Airflow (6 bar)	120 l/m	130 l/m
Noise Level (Lpa)	67 dB	69 dB

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year
Art. Nr.	AFN0036EU	AFN0037EU

AC20224BL
COMPRESSOR



FEATURES

- Integrated 230V 2-pole motor
- Handle
- High stability
- Horizontal tank
- Universal air couplings

APPLICATIONS

Brad nailers, finish nailers, light & medium staplers

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	AC20224BL	AC20250BL
Weight	22.0 kg	31.0 kg
Power	230V / 1.5 kW (2 HP)	230V / 1.5 kW (2 HP)
RPM	2800	2800
Tank Capacity	24 l	50 l
Maximum Pressure	9 bar	9 bar
Air Displacement	202 l/m	202 l/m
Airflow (6 bar)	130 l/m	130 l/m
Noise Level (Lpa)	69 dB	69 dB







NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year
Art. Nr.	AFN0038EU	AFN0039EU

COMPRESSORS

CUSTOMISED COMPRESSED AIR


CHOOSE THE RIGHT COMPRESSOR








	 AC4504	 AC8305	 AC10304	 AC12810	 AC12824	 AC24016
Nominal power (HP)	0.37	0.5	0.75	1	1	2
Tank Capacity (l)	4	5	4	10	24	16
Weight (kg)	11	14.1	17.1	25.8	22	48.5
Noise Level (dB)	58	60	60	65	65	72
Finishing	●	●	●	●	●	○
Upholstery	●	●	●	●	●	○
Roof and facade cladding			●	●	●	●
Construction						●
(Sub)floors						●
Pallets & boxes						●

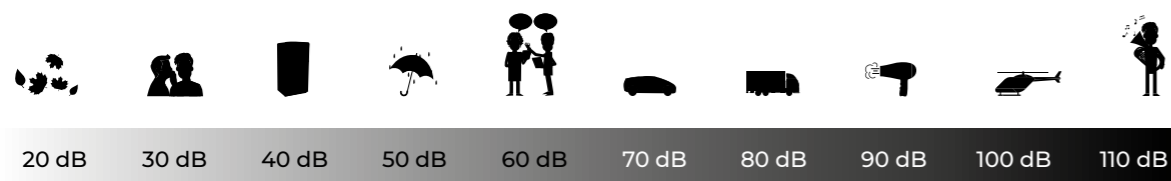● = Recommended


○ = Overcapacity

Noise level



 AC24050	 AC24080	 AC32024	 AC19306BL	 AC20216BL	 AC20224BL	 AC20250BL
2	2	3	1.5	2	2	2
50	80	24	6	16	24	50
40.0	63.5	54.0	15.8	24.0	22.0	31.0
72	72	72	67	69	69	69
○	○	○	●	●	○	○
○	○	○	●	●	○	○
●	●	●	●	●	●	●
●	●	●	●	●	●	●
●	●	●		●	●	●
●	●	●			●	●

Tank size

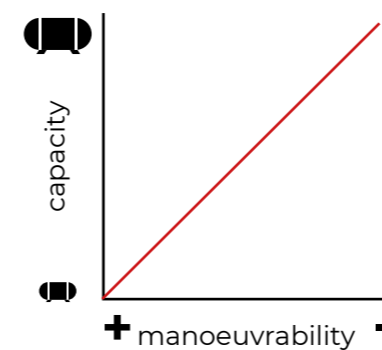

Benefit of oil-free compressors

These SENCO oil-free compressors are better for the environment and easier to use with no oil mess.

Accessories

Discover our full range of couplings and hoses on our website.



ACCESSORIES



Air Hose Kit Universal
4000660



FEATURES

- Swivel fittings prevents hose twist
- Hose guards for increased hose life
- 10m length
- 8mm diameter

Hose Reel Universal PU
4000730



FEATURES

- Easy mount bracket
- 360° swivel base
- 30m length
- 8mm diameter

Air Blow Gun
400032



FEATURES

- Very light blow gun
- 300 serie coupling
- Its long nose makes it easy to reach difficult places

Air Accessory Kit
400050



FEATURES

- Washing gun
- Tire inflating gun
- Paint spray gun
- Air blow gun
- Hose

This Senco accessory set will get you started right away with your awesome Senco compressor.

Polar Fuel Cells, 40 gram
PC1307P



Polar Fuel Cells, 40 gram
PC1308P _ 12 PIECES



Polar Fuel Cells, 18 gram
PC1309P _ 12 PIECES



DURASPIN

AUTO-FEED SCREWDRIVERS



FAST AND EFFICIENT SCREWING

Built to deliver long-lasting performance, Senco DuraSpin auto-feed screwdrivers are equipped with features designed for speed, precision and ease of use. With our auto-feed screwdrivers, you can attach plasterboard effortlessly and quickly, saving time and labour costs.

DS522-18V
HEAVY DUTY 55MM



FEATURES

- Selectable 2500/1600 RPM high torque brushless motor
- Patent pending corner-fit system
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock

APPLICATIONS

Drywall to wood/Lt.Steel, decking to soft wood, cement/fibre enforced boards, underlayment, rigid foam insulations, decking, drywall to wood or steel, metal framing, Sheathing to wood or steel

DS525-18V
HIGH SPEED 55MM



FEATURES

- 5000 RPM high torque motor
- Patent pending corner-fit system
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock

APPLICATIONS

Drywall to wood/Lt.Steel, decking to soft wood, cement/fibre enforced boards, underlayment, rigid foam insulations

DS722-18V
HEAVY DUTY 75MM



FEATURES

- 2500 RPM high torque motor
- Patent pending corner-fit system
- Drives up to 75mm screws
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock

APPLICATIONS

Drywall to wood/Lt.Steel, decking to soft wood, cement/fibre enforced boards, underlayment, rigid foam insulations, decking, drywall to wood or steel, metal framing, Sheathing to wood or steel

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	DS522-18V	DS525-18V	DS722-18V
Weight	2.48 kg	2.46 kg	2.7 kg
Number of batteries in kit	2	2	2
Battery	18 V 3 Ah Li-Ion	18 V 3 Ah Li-Ion	18 V 3 Ah Li-Ion
Torque (Nm)	8	5	8
RPM	1600-2500 RPM	5000 RPM	2500 RPM

NON-TECHNICAL SPECIFICATIONS

Warranty	5 years	5 years	5 years
Art. Nr.	10B2001N	10A2001N	10C2001N

FASTENER SPECIFICATIONS

Screw Length	25-55 mm	25-55 mm	25-75 mm
Screw Diameter	3.5-5.5 mm	3.5-5.5 mm	3.5-5.5 mm

DURASPIN CORDED

DS5525-AC HEAVY DUTY 55MM



FEATURES

- 2500 RPM high torque motor
- Patent pending corner-fit system
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock

APPLICATIONS

Drywall to wood/Lt.Steel, decking to soft wood, cement/fibre enforced boards, underlayment, rigid foam insulations, decking, drywall to wood or steel, metal framing, Sheating to wood or steel

DS5550-AC HIGH SPEED 55MM



FEATURES

- 5000 RPM high speed motor
- Patent pending corner-fit system
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock

APPLICATIONS

Drywall to wood/Lt.Steel, decking to soft wood, cement/fibre enforced boards, underlayment, rigid foam insulations

DS7525-AC HEAVY DUTY 75MM



FEATURES

- 2500 RPM high torque motor
- Patent pending corner-fit system
- Patented sliding screw guide
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock

APPLICATIONS

Drywall to wood/Lt.Steel, decking to soft wood, cement/fibre enforced boards, underlayment, rigid foam insulations, decking, drywall to wood or steel, metal framing, Sheating to wood or steel

PRODUCT REFERENCE CHART

TECHNICAL SPECIFICATIONS

	DS5525-AC	DS5550-AC	DS7525-AC
Weight	2.1 kg	2.51 kg	2.7 kg
Voltage (ac)	230 V	230 V	230 V
Torque (Nw)	11	7	11
RPM	2500 RPM	5000 RPM	2500 RPM

NON-TECHNICAL SPECIFICATIONS

Warranty	1 year	1 year	1 year
Art. Nr.	7U2001N	7T2001N	7V2001N

FASTENER SPECIFICATIONS

Screw Length	25-55 mm	25-55 mm	25-75 mm
Screw Diameter	3.5-5.5 mm	3.5-5.5 mm	3.5-5.5 mm

THE RIGHT TOOL FOR THE JOB

			Drywall to wood/Lt.Steel (<0,9mm)	Decking to soft wood	Cement/fibre enforced boards	Underlayment	Rigid foam insulations	Decking	Drywall to wood or steel (<3mm with drillpoint)	Metal framing	Sheating to wood or steel
CORDLESS	DS525 	25-55mm 5000rpm	●	●	●	●	●				
	DS522 	25-55mm 1600/2500rpm	●	●	●	●	●	●	●	●	●
	DS722 	25-75mm 1600/2500rpm	●	●	●	●	●	●	●	●	●
CORDED	DS5550-AC 	25-55mm 5000rpm	●	●	●	●	●				
	DS5525-AC 	25-55mm 2500rpm	●	●	●	●	●	●	●	●	●
	DS7525-AC 	25-75mm 2500rpm	●	●	●	●	●	●	●	●	●
ATTACHMENTS	DS55* 	25-55mm	●	●	●	●	●		* Requires corresponding machine: DeWalt DW268, DCF620, Makita DFS452, FS2300, FS2500, FS4300, FS6300.		

FASTENERS

NAILING, STAPLING OR SCREWING

SENCO nails, staples and screws are available in different sizes and materials, allowing you to choose the right fastener for your specific applications.

SENCO



STRIPNAILS

PINS




TOOLS
FinishPro10

0°

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
PINS						
CZ08ECA	0,68mm	12mm	Chisel	Galvanised	Straight Glued strip	10.000
CZ10ECA	0,68mm	15mm	Chisel	Galvanised	Straight Glued strip	10.000
CZ11ECA	0,68mm	18mm	Chisel	Galvanised	Straight Glued strip	10.000
CZ13EGA	0,68mm	25mm	Chisel	Galvanised	Straight Glued strip	10.000

STRIPNAILS

BRADS

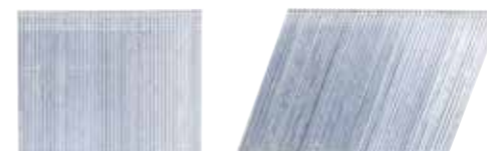

TOOLS
1,2 MM SLP20XP, SLP20XP GLN, FinishPro18Mg, S200BN, F-18XP
1,6 MM FinishPro16XP, F-16XP
1,6 MM 20° GT65i-RH

0°

20°


Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
BRADS 1,2MM						
AX10EAAP	1,2mm	15mm	Chisel	Galvanised	Straight Glued strip	5.000
AX11EAAP	1,2mm	20mm	Chisel	Galvanised	Straight Glued strip	5.000
AX13EAAP	1,2mm	25mm	Chisel	Galvanised	Straight Glued strip	5.000
AX15EAAP	1,2mm	30mm	Chisel	Galvanised	Straight Glued strip	5.000
AX16EAAP	1,2mm	35mm	Chisel	Galvanised	Straight Glued strip	5.000
AX17EAAP	1,2mm	38mm	Chisel	Galvanised	Straight Glued strip	5.000
AX18EAAP	1,2mm	42mm	Chisel	Galvanised	Straight Glued strip	5.000
AX19EAAP	1,2mm	45mm	Chisel	Galvanised	Straight Glued strip	5.000
AX21EAAP	1,2mm	50mm	Chisel	Galvanised	Straight Glued strip	5.000
AX22EAAP	1,2mm	55mm	Chisel	Galvanised	Straight Glued strip	5.000
AX11EGA	1,2mm	20mm	Chisel	Stainless 304	Straight Glued strip	5.000
AX13EGA	1,2mm	25mm	Chisel	Stainless 304	Straight Glued strip	5.000
AX15EGA	1,2mm	30mm	Chisel	Stainless 304	Straight Glued strip	5.000
AX17EGA	1,2mm	38mm	Chisel	Stainless 304	Straight Glued strip	5.000
AX19EGA	1,2mm	45mm	Chisel	Stainless 304	Straight Glued strip	5.000
AX21EGA	1,2mm	50mm	Chisel	Stainless 304	Straight Glued strip	5.000

BRADS

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
BRADS 1,6MM						
RX13EAA	1,6mm	25mm	Chisel	Galvanised	Straight Glued strip	2.000
RX15EAA	1,6mm	32mm	Chisel	Galvanised	Straight Glued strip	2.000
RX17EAA	1,6mm	38mm	Chisel	Galvanised	Straight Glued strip	2.000
RX19EAA	1,6mm	45mm	Chisel	Galvanised	Straight Glued strip	2.000
RX21EAA	1,6mm	50mm	Chisel	Galvanised	Straight Glued strip	2.000
RX23EAA	1,6mm	55mm	Chisel	Galvanised	Straight Glued strip	2.000
RX25EAA	1,6mm	63mm	Chisel	Galvanised	Straight Glued strip	2.000
RX13EGA	1,6mm	25mm	Chisel	Stainless 304	Straight Glued strip	2.000
RX15EGA	1,6mm	32mm	Chisel	Stainless 304	Straight Glued strip	2.000
RX16EGA	1,6mm	35mm	Chisel	Stainless 304	Straight Glued strip	2.000
RX17EGA	1,6mm	38mm	Chisel	Stainless 304	Straight Glued strip	2.000
RX21EGA	1,6mm	50mm	Chisel	Stainless 304	Straight Glued strip	2.000
BRADS 1,6MM 20° ANGLED						
RH15EAA	1,6mm	32mm	Chisel	Galvanised	20° Angled Glued strip	2.000
RH17EAA	1,6mm	38mm	Chisel	Galvanised	20° Angled Glued strip	2.000
RH19EAA	1,6mm	45mm	Chisel	Galvanised	20° Angled Glued strip	2.000
RH21EAA	1,6mm	50mm	Chisel	Galvanised	20° Angled Glued strip	2.000
RH25EAA	1,6mm	63mm	Chisel	Galvanised	20° Angled Glued strip	2.000
RH15EGA	1,6mm	32mm	Chisel	Stainless 304	20° Angled Glued strip	2.000
RH17EGA	1,6mm	38mm	Chisel	Stainless 304	20° Angled Glued strip	2.000

FINISH NAILS

DA



TOOLS
DA NAILS FinishPro35Mg, FinishPro30XP,
 FinishPro35BL, F-15XP,
 GT65i-DA

34°

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
DA NAILS						
DA13EABN	1,8mm	25mm	Chisel	Galvanised	34° Angled Tape strip	4.000
DA15EABN	1,8mm	32mm	Chisel	Galvanised	34° Angled Tape strip	4.000
DA17EABN	1,8mm	38mm	Chisel	Galvanised	34° Angled Tape strip	4.000
DA19EABN	1,8mm	45mm	Chisel	Galvanised	34° Angled Tape strip	4.000
DA21EABN	1,8mm	50mm	Chisel	Galvanised	34° Angled Tape strip	4.000
DA23EABN	1,8mm	56mm	Chisel	Galvanised	34° Angled Tape strip	4.000
DA25EABN	1,8mm	63mm	Chisel	Galvanised	34° Angled Tape strip	3.000
DA13EGB	1,8mm	25mm	Chisel	Stainless 304	34° Angled Tape strip	4.000
DA15EGB	1,8mm	32mm	Chisel	Stainless 304	34° Angled Tape strip	4.000
DA17EGB	1,8mm	38mm	Chisel	Stainless 304	34° Angled Tape strip	4.000
DA19EGB	1,8mm	45mm	Chisel	Stainless 304	34° Angled Tape strip	4.000
DA21EGB	1,8mm	50mm	Chisel	Stainless 304	34° Angled Tape strip	4.000
DA25EGB	1,8mm	63mm	Chisel	Stainless 304	34° Angled Tape strip	4.000

DA NAGELS

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
DA13EMB	1,8mm	25mm	Chisel	Aluminium	34° Angled Tape strip	4.000
DA15EMB	1,8mm	32mm	Chisel	Aluminium	34° Angled Tape strip	4.000
DA17EMB	1,8mm	38mm	Chisel	Aluminium	34° Angled Tape strip	4.000
DA21EMB	1,8mm	50mm	Chisel	Aluminium	34° Angled Tape strip	4.000
DA17AIA	1,8mm	38mm	Chisel	Galvanised High Tensile	34° Angled Tape strip	4.000
DA19AIA	1,8mm	45mm	Chisel	Galvanised High Tensile	34° Angled Tape strip	4.000

STRIPNAILS

CLIPPED HEAD



TOOLS
CLIPPED HEAD FramePro601, FramePro651,
 F-35XP, SGT90i

34°

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
CLIPPED HEAD STRIPNAILS						
GLAD						
GC51APBKR	2,9mm	50mm	Diamond	Plain	34° Angled Tape strip	2.000
GC52APBKR	2,9mm	55mm	Diamond	Plain	34° Angled Tape strip	2.000
GC55APBKR	2,9mm	65mm	Diamond	Plain	34° Angled Tape strip	2.000
GC56APBKR	2,9mm	70mm	Diamond	Plain	34° Angled Tape strip	2.000
GC57APBKR	2,9mm	75mm	Diamond	Plain	34° Angled Tape strip	2.000
GC58APBKR	2,9mm	80mm	Diamond	Plain	34° Angled Tape strip	2.000
HC57APBKR	3,1mm	75mm	Diamond	Plain	34° Angled Tape strip	2.000
HC58APBKR	3,1mm	80mm	Diamond	Plain	34° Angled Tape strip	2.000
HC59APBKR	3,1mm	90mm	Diamond	Plain	34° Angled Tape strip	2.000
HC60APBKR	3,1mm	100mm	Diamond	Plain	34° Angled Tape strip	2.000
GC51AABKR	2,9mm	50mm	Diamond	Galvanised	34° Angled Tape strip	2.000
GC52AABKR	2,9mm	55mm	Diamond	Galvanised	34° Angled Tape strip	2.000
GC55AABKR	2,9mm	65mm	Diamond	Galvanised	34° Angled Tape strip	2.000
GC56AABKR	2,9mm	70mm	Diamond	Galvanised	34° Angled Tape strip	2.000
GC57AABKR	2,9mm	75mm	Diamond	Galvanised	34° Angled Tape strip	2.000
HC57AABKR	3,1mm	75mm	Diamond	Galvanised	34° Angled Tape strip	2.000
HC58AABKR	3,1mm	80mm	Diamond	Galvanised	34° Angled Tape strip	2.000
HC59AABKR	3,1mm	90mm	Diamond	Galvanised	34° Angled Tape strip	2.000
HC59EABKR	3,1mm	90mm	Chisel	Galvanised	34° Angled Tape strip	2.000

CLIPPED HEAD

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
RING						
GE51APBKR	2,9mm	50mm	Diamond	Plain	34° Angled Tape strip	2.000
GE52APBKR	2,9mm	55mm	Diamond	Plain	34° Angled Tape strip	2.000
GE54APBKR	2,9mm	60mm	Diamond	Plain	34° Angled Tape strip	2.000
GE55APBKR	2,9mm	65mm	Diamond	Plain	34° Angled Tape strip	2.000
GE57APBKR	2,9mm	75mm	Diamond	Plain	34° Angled Tape strip	2.000
GE58APBKR	2,9mm	80mm	Diamond	Plain	34° Angled Tape strip	2.000
HE57APBKR	3,1mm	75mm	Diamond	Plain	34° Angled Tape strip	2.000
HE59APBKR	3,1mm	90mm	Diamond	Plain	34° Angled Tape strip	2.000
GE51AABKR	2,9mm	50mm	Diamond	Galvanised	34° Angled Tape strip	2.000
GE54AABKR	2,9mm	60mm	Diamond	Galvanised	34° Angled Tape strip	2.000
GE55AABKR	2,9mm	65mm	Diamond	Galvanised	34° Angled Tape strip	2.000
GE57AABKR	2,9mm	75mm	Diamond	Galvanised	34° Angled Tape strip	2.000
HE58AABKR	3,1mm	80mm	Diamond	Galvanised	34° Angled Tape strip	2.000

COILNAILS

SMOOTH



TOOLS
SCN49XP, CoilPro50, SCN65XP, CoilPro90, S65CNP

15°

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
SMOOTH NAILS						
PLAIN						
SC15APBV	2,1mm	32mm	Diamond	Plain	15° Angled Wire Collated	18.900
SC17AABV	2,1mm	38mm	Diamond	Plain	15° Angled Wire Collated	15.750
SC17APBV	2,1mm	38mm	Diamond	Plain	15° Angled Wire Collated	15.750
SC19APBV	2,1mm	45mm	Diamond	Plain	15° Angled Wire Collated	12.600
SC21AABV	2,1mm	50mm	Diamond	Plain	15° Angled Wire Collated	12.600
SC21APBV	2,1mm	50mm	Diamond	Plain	15° Angled Wire Collated	12.600
BJ21APBF	2,5mm	50mm	Diamond	Plain	15° Angled Wire Collated	9.900
BJ22APBF	2,5mm	55mm	Diamond	Plain	15° Angled Wire Collated	7.425
BJ24APBF	2,5mm	60mm	Diamond	Plain	15° Angled Wire Collated	7.425
BJ25APBF	2,5mm	65mm	Diamond	Plain	15° Angled Wire Collated	7.425
BJ26APBF	2,5mm	70mm	Diamond	Plain	15° Angled Wire Collated	7.425
BJ27APBF	2,5mm	75mm	Diamond	Plain	15° Angled Wire Collated	7.425
GD25APBF	2,87mm	65mm	Diamond	Plain	15° Angled Wire Collated	6.750
GD26APBF	2,87mm	70mm	Diamond	Plain	15° Angled Wire Collated	6.750
GD28APBF	2,87mm	80mm	Diamond	Plain	15° Angled Wire Collated	4.500
GD29APBF	2,87mm	90mm	Diamond	Plain	15° Angled Wire Collated	4.500

SMOOTH

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
GALVANISED						
BJ21AABF	2,5mm	50mm	Diamond	Galvanised	15° Angled Wire Collated	9.900
BJ25AABF	2,5mm	65mm	Diamond	Galvanised	15° Angled Wire Collated	7.425
GD25AABF	2,87mm	65mm	Diamond	Galvanised	15° Angled Wire Collated	6.750

COIL NAILS

RING



TOOLS
SCN49XP, CoilPro50, SCN65XP, CoilPro90, S65CNP

15°

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
RING NAILS						
PLAIN						
BL21APBF	2,5mm	50mm	Diamond	Plain	15° Angled Wire Collated	9.900
BL22APBF	2,5mm	55mm	Diamond	Plain	15° Angled Wire Collated	7.425
BL24APBF	2,5mm	60mm	Diamond	Plain	15° Angled Wire Collated	7.425
BL25APBF	2,5mm	65mm	Diamond	Plain	15° Angled Wire Collated	7.425
BL26APBF	2,5mm	70mm	Diamond	Plain	15° Angled Wire Collated	7.425
BL27APBF	2,5mm	75mm	Diamond	Plain	15° Angled Wire Collated	7.425
GL24APBF	2,87mm	60mm	Diamond	Plain	15° Angled Wire Collated	6.750
GL25APBF	2,87mm	65mm	Diamond	Plain	15° Angled Wire Collated	6.750
GL26APBF	2,87mm	70mm	Diamond	Plain	15° Angled Wire Collated	6.750
GL27APBF	2,87mm	75mm	Diamond	Plain	15° Angled Wire Collated	6.750
GL28APBF	2,87mm	80mm	Diamond	Plain	15° Angled Wire Collated	4.500
GL29APBF	2,87mm	90mm	Diamond	Plain	15° Angled Wire Collated	4.500
HL29APBF	3,1mm	90mm	Diamond	Plain	15° Angled Wire Collated	4.050
GALVANISED						
BL21AABF	2,5mm	50mm	Diamond	Galvanised	15° Angled Wire Collated	9.900
BL22AABF	2,5mm	55mm	Diamond	Galvanised	15° Angled Wire Collated	7.425
BL24AABF	2,5mm	60mm	Diamond	Galvanised	15° Angled Wire Collated	7.425
BL25AABF	2,5mm	65mm	Diamond	Galvanised	15° Angled Wire Collated	7.425
HL29AABF	3,1mm	90mm	Diamond	Galvanised	15° Angled Wire Collated	4.050
STAINLESS 304						
SS15AGBC	2,1mm	32mm	Diamond	Stainless 304 A304	15° Angled Plastic Collated	8.400
SS16AGBC	2,1mm	35mm	Diamond	Stainless 304 A304	15° Angled Plastic Collated	7.200
SS19AGBC	2,1mm	45mm	Diamond	Stainless 304 A304	15° Angled Plastic Collated	6.000
SS21AGBC	2,1mm	50mm	Diamond	Stainless 304 A304	15° Angled Plastic Collated	6.000
BS16AGBC	2,5mm	35mm	Diamond	Stainless 304 A304	15° Angled Plastic Collated	7.200
BS19AGBC	2,5mm	45mm	Diamond	Stainless 304 A304	15° Angled Plastic Collated	6.000
BS21AGBC	2,5mm	50mm	Diamond	Stainless 304 A304	15° Angled Plastic Collated	4.800
BS25AGBC	2,5mm	65mm	Diamond	Stainless 304 A304	15° Angled Plastic Collated	4.200
BS25AUBC	2,5mm	65mm	Diamond	Stainless 304 A316	15° Angled Plastic Collated	4.200
GS26AGAF	2,87mm	70mm	Diamond	Stainless 304 A304	15° Angled Wire Collated	6.000

RING

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
HOT DIPPED GALVANISED (DRYWALL)						
SG16ASAA	2,1mm	35mm	Diamond	Hot dipped galva	15° Angled Wire Collated 16mm	12.800
SG21ASAA	2,1mm	50mm	Diamond	Hot dipped galva	15° Angled Wire Collated 16mm	8.400
SG16ASAC	2,1mm	35mm	Diamond	Hot dipped galva	15° Angled Wire Collated 16mm	8.400
SG21ASAC	2,1mm	50mm	Diamond	Hot dipped galva	15° Angled Wire Collated 16mm	6.000

COIL NAILS

RING CONICAL



TOOLS
CoilPro50, CoilPro90

15°

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
RING NAIL CONICAL						
SE15APBV	2,1mm	32mm	Diamond	Plain	15° Con. Wire Welded Coil	18.900
SE16APBV	2,1mm	35mm	Diamond	Plain	15° Con. Wire Welded Coil	18.900
SE17APBV	2,1mm	38mm	Diamond	Plain	15° Con. Wire Welded Coil	15.750
SE19APBV	2,1mm	45mm	Diamond	Plain	15° Con. Wire Welded Coil	12.600
SE21APBV	2,1mm	50mm	Diamond	Plain	15° Con. Wire Welded Coil	12.600
SE15AABV	2,1mm	32mm	Diamond	Galvanised	15° Con. Wire Welded Coil	18.900
SE17AABV	2,1mm	38mm	Diamond	Galvanised	15° Con. Wire Welded Coil	15.750
SE19AABV	2,1mm	45mm	Diamond	Galvanised	15° Con. Wire Welded Coil	12.600
SE21AABV	2,1mm	50mm	Diamond	Galvanised	15° Con. Wire Welded Coil	12.600
SS16AGAVG	2,1mm	35mm	Diamond	Stainless 304 A304	15° Con. Wire Welded Coil	18.900
SS19AGAVG	2,1mm	45mm	Diamond	Stainless 304 A304	15° Con. Wire Welded Coil	12.600
SS21AGAVGN	2,1mm	50mm	Diamond	Stainless 304 A304	15° Con. Wire Welded Coil	10.500

COIL NAILS

RING BALLISTISCH



TOOLS
SCN49XP, CoilPro50,

15°

Art. Nr.	Diameter	Length	Point	Finish	Collation	BX (Box)
RING NAIL BALLISTIC						
BX16AIAC	2,5mm	35mm	Diamond	Galvanised	15° Flat Plastic Coil	8.400
BX17AIAC	2,5mm	38mm	Diamond	Galvanised	15° Flat Plastic Coil	6.000

LIGHT WIRE STAPLES

A STAPLE



TOOLS
SFT10XP-A/D

22_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
A02BAAP	4,8mm	4mm	Chisel	Galvanised	Straight Glued strip	60.000
A04BAAP	4,8mm	6mm	Chisel	Galvanised	Straight Glued strip	60.000
A05BAAP	4,8mm	8mm	Chisel	Galvanised	Straight Glued strip	40.000
A06BAAP	4,8mm	10mm	Chisel	Galvanised	Straight Glued strip	40.000
A08BAAP	4,8mm	12mm	Chisel	Galvanised	Straight Glued strip	30.000
A09BAAP	4,8mm	14mm	Chisel	Galvanised	Straight Glued strip	26.000
A10BAAP	4,8mm	16mm	Chisel	Galvanised	Straight Glued strip	22.000

LIGHT WIRE STAPLES

AT STAPLE




TOOLS
SFT10XP-AT, SFW09-AT

21_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
AT04BAAP	12,7mm	6mm	Chisel	Galvanised	Straight Glued strip	24.000
AT05BAAP	12,7mm	8mm	Chisel	Galvanised	Straight Glued strip	20.000
AT06BAAP	12,7mm	10mm	Chisel	Galvanised	Straight Glued strip	16.000
AT08BAAP	12,7mm	12mm	Chisel	Galvanised	Straight Glued strip	21.000
AT09BAAP	12,7mm	14mm	Chisel	Galvanised	Straight Glued strip	18.000
AT10BAAP	12,7mm	16mm	Chisel	Galvanised	Straight Glued strip	15.000
AT06BGA	12,7mm	10mm	Chisel	Stainless 304	Straight Glued strip	10.000
AT10BGA	12,7mm	16mm	Chisel	Stainless 304	Straight Glued strip	10.000

LIGHT WIRE STAPLES

B STAPLE



TOOLS
SFT10XP-B

22_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
B02BAAP	12,7mm	4mm	Chisel	Galvanised	Straight Glued strip	40.000
B03BAAP	12,7mm	5mm	Chisel	Galvanised	Straight Glued strip	35.000
B04BAAP	12,7mm	6mm	Chisel	Galvanised	Straight Glued strip	25.000
B05BAAP	12,7mm	8mm	Chisel	Galvanised	Straight Glued strip	45.000
B06BAAP	12,7mm	10mm	Chisel	Galvanised	Straight Glued strip	40.000
B08BAAP	12,7mm	12mm	Chisel	Galvanised	Straight Glued strip	25.000
B10BAAP	12,7mm	16mm	Chisel	Galvanised	Straight Glued strip	22.000

LIGHT WIRE STAPLES

C STAPLE



TOOLS
SFT10XP-C, SFW09-C

22_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
C02BAAP	12,7mm	4mm	Chisel	Galvanised	Straight Glued strip	60.000
C03BAAP	12,7mm	5mm	Chisel	Galvanised	Straight Glued strip	55.000
C04BAAP	12,7mm	6mm	Chisel	Galvanised	Straight Glued strip	35.000
C05BAAP	12,7mm	8mm	Chisel	Galvanised	Straight Glued strip	28.000
C06BAAP	9,5mm	10mm	Chisel	Galvanised	Straight Glued strip	50.000
C08BAAP	9,5mm	12mm	Chisel	Galvanised	Straight Glued strip	35.000
C09BAAP	9,5mm	14mm	Chisel	Galvanised	Straight Glued strip	32.000
C10BAAP	9,5mm	16mm	Chisel	Galvanised	Straight Glued strip	27.000
C08FAA	9,5mm	12mm	Chisel	Galvanised	Straight Glued strip	35.000
C03BGAP	12,7mm	5mm	Chisel	Stainless 304	Straight Glued strip	55.000
C04BGAP	12,7mm	6mm	Chisel	Stainless 304	Straight Glued strip	35.000
C05BGAP	12,7mm	8mm	Chisel	Stainless 304	Straight Glued strip	28.000
C06BGAP	9,5mm	10mm	Chisel	Stainless 304	Straight Glued strip	25.000
C08BGAP	9,5mm	12mm	Chisel	Stainless 304	Straight Glued strip	17.500
C10BGAP	9,5mm	16mm	Chisel	Stainless 304	Straight Glued strip	13.500

LIGHT WIRE STAPLES

F STAPLE




TOOLS
SFT10XP-F, SFW09-F

20_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
F04BAAP	12,7mm	6mm	Chisel	Galvanised	Straight Glued strip	34.000
F05BAAP	12,7mm	8mm	Chisel	Galvanised	Straight Glued strip	30.000
F06BAAP	12,7mm	10mm	Chisel	Galvanised	Straight Glued strip	24.000
F08BAAP	12,7mm	12mm	Chisel	Galvanised	Straight Glued strip	14.000
F10BAAP	12,7mm	16mm	Chisel	Galvanised	Straight Glued strip	12.000
F05BGAP	12,7mm	8mm	Chisel	Stainless 304	Straight Glued strip	15.000
F06BGAP	12,7mm	10mm	Chisel	Stainless 304	Straight Glued strip	12.000
F08BGAP	12,7mm	12mm	Chisel	Stainless 304	Straight Glued strip	7.000

MEDIUM WIRE STAPLES

L STAPLE




TOOLS
SLS20XP-L, SKSXP-L, SLS18Mg-L, ST10LS-L

18_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
L08BAB	6,4mm	12mm	Chisel	Galvanised	Glued	10.000
L10BAB	6,4mm	16mm	Chisel	Galvanised	Glued	5.000
L11BAB	6,4mm	19mm	Chisel	Galvanised	Glued	5.000
L12BAB	6,4mm	22mm	Chisel	Galvanised	Glued	5.000
L13BAB	6,4mm	25mm	Chisel	Galvanised	Glued	5.000
L14BAB	6,4mm	28mm	Chisel	Galvanised	Glued	5.000
L15BAB	6,4mm	32mm	Chisel	Galvanised	Glued	5.000
L17BAB	6,4mm	38mm	Chisel	Galvanised	Glued	5.000
L08BGA	6,4mm	12mm	Chisel	Stainless 304	Glued	10.000
L10BGA	6,4mm	16mm	Chisel	Stainless 304	Glued	5.000
L11BGA	6,4mm	19mm	Chisel	Stainless 304	Glued	5.000
L13BGA	6,4mm	25mm	Chisel	Stainless 304	Glued	5.000
L15BGA	6,4mm	32mm	Chisel	Stainless 304	Glued	5.000
L17BGA	6,4mm	38mm	Chisel	Stainless 304	Glued	5.000

MEDIUM WIRE STAPLES

M STAPLE



TOOLS
SLS20XP-M, SKSXP-M

18_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
M08BAB	9,5mm	12mm	Chisel	Galvanised	Glued	5.000
M10BAB	9,5mm	16mm	Chisel	Galvanised	Glued	5.000
M11BAB	9,5mm	19mm	Chisel	Galvanised	Glued	5.000
M12BAB	9,5mm	22mm	Chisel	Galvanised	Glued	5.000
M13BAB	9,5mm	25mm	Chisel	Galvanised	Glued	5.000
M14BAB	9,5mm	28mm	Chisel	Galvanised	Glued	5.500
M15BAB	9,5mm	32mm	Chisel	Galvanised	Glued	10.000
M17BAB	9,5mm	38mm	Chisel	Galvanised	Glued	10.000
M08BGA	9,5mm	12mm	Chisel	Stainless 304	Glued	5.000
M10BGA	9,5mm	16mm	Chisel	Stainless 304	Glued	5.000
M11BGA	9,5mm	19mm	Chisel	Stainless 304	Glued	5.000
M13BGA	9,5mm	25mm	Chisel	Stainless 304	Glued	5.000
M17BGB	9,5mm	38mm	Chisel	Stainless 304	Glued	10.000

HEAVY WIRE STAPLES

N STAPLE




TOOLS
SNS41, NS20XP

16_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
N11BRBB	10,6mm	19mm	Chisel	Plain	Glued	20.000
N12BRBB	10,6mm	22mm	Chisel	Plain	Glued	2.000
N13BRBB	10,6mm	25mm	Chisel	Plain	Glued	20.000
N14BRBB	10,6mm	28mm	Chisel	Plain	Glued	10.000
N15BRBB	10,6mm	32mm	Chisel	Plain	Glued	10.000
N16BRBB	10,6mm	35mm	Chisel	Plain	Glued	10.000
N17BRBB	10,6mm	38mm	Chisel	Plain	Glued	10.000
N19BRBB	10,6mm	44mm	Chisel	Plain	Glued	10.000
N21BRBB	10,6mm	50mm	Chisel	Plain	Glued	10.000
N25BRBB	10,6mm	63mm	Chisel	Plain	Glued	6.500
N11BABB	10,6mm	19mm	Chisel	Galvanised	Glued	20.000
N12BABB	10,6mm	22mm	Chisel	Galvanised	Glued	20.000
N13BABB	10,6mm	25mm	Chisel	Galvanised	Glued	20.000
N14BABB	10,6mm	28mm	Chisel	Galvanised	Glued	10.000
N15BABB	10,6mm	32mm	Chisel	Galvanised	Glued	10.000
N16BABB	10,6mm	35mm	Chisel	Galvanised	Glued	10.000
N17BABB	10,6mm	38mm	Chisel	Galvanised	Glued	10.000
N19BABB	10,6mm	44mm	Chisel	Galvanised	Glued	10.000
N21BABB	10,6mm	50mm	Chisel	Galvanised	Glued	10.000
N25BABB	10,6mm	63mm	Chisel	Galvanised	Glued	6.500
N17BXBB-ETA	10,6mm	38mm	Chisel	Galvanised 12m μ	Glued	10.000
N19BXBB-ETA	10,6mm	44mm	Chisel	Galvanised 12m μ	Glued	10.000
N21BXBB-ETA	10,6mm	50mm	Chisel	Galvanised 12m μ	Glued	10.000
N23BXBB-ETA	10,6mm	56mm	Chisel	Galvanised 12m μ	Glued	6.500
N25BXBB-ETA	10,6mm	63mm	Chisel	Galvanised 12m μ	Glued	6.500
N21BGB-ETA	10,6mm	50mm	Chisel	Stainless 304	Glued	10.000
N10LAB	10,6mm	16mm	Divergent	Galvanised	Glued	10.000
N11LAB	10,6mm	19mm	Divergent	Galvanised	Glued	10.000
N12LAB	10,6mm	22mm	Divergent	Galvanised	Glued	10.000
N14LAB	10,6mm	28mm	Divergent	Galvanised	Glued	10.000
N17BGA	10,6mm	38mm	Divergent	Galvanised	Glued	10.000

HEAVY WIRE STAPLES

P STAPLE



TOOLS
PS15XP

16_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
P10BABB	25,4mm	16mm	Chisel	Galvanised	Glued	10.000
P11BABB	25,4mm	19mm	Chisel	Galvanised	Glued	10.000
P12BABB	25,4mm	22mm	Chisel	Galvanised	Glued	10.000
P13BABB	25,4mm	25mm	Chisel	Galvanised	Glued	10.000
P15BABB	25,4mm	32mm	Chisel	Galvanised	Glued	5.000
P17BABB	25,4mm	38mm	Chisel	Galvanised	Glued	5.000
P21BABB	25,4mm	50mm	Chisel	Galvanised	Glued	5.000

HEAVY WIRE STAPLES

Q STAPLE



TOOLS
SQS55XP

15_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
Q17BRBB	11,1mm	38mm	Chisel	Plain	Glued	5.000
Q19BRBB	11,1mm	44mm	Chisel	Plain	Glued	5.000
Q21BRBB	11,1mm	50mm	Chisel	Plain	Glued	5.000
Q25BRBB	11,1mm	63mm	Chisel	Plain	Glued	5.000
Q17BABB	11,1mm	38mm	Chisel	Galvanised	Glued	5.000
Q19BABB	11,1mm	44mm	Chisel	Galvanised	Glued	5.000
Q21BABB	11,1mm	50mm	Chisel	Galvanised	Glued	5.000
Q23BABB	11,1mm	56mm	Chisel	Galvanised	Glued	5.000
Q25BABB	11,1mm	63mm	Chisel	Galvanised	Glued	5.000
Q17BXBB-ETA	11,1mm	38mm	Chisel	Galvanised 12m μ	Glued	5.000
Q19BXBB-ETA	11,1mm	44mm	Chisel	Galvanised 12m μ	Glued	5.000
Q21BXBB-ETA	11,1mm	50mm	Chisel	Galvanised 12m μ	Glued	5.000
Q23BXBB-ETA	11,1mm	56mm	Chisel	Galvanised 12m μ	Glued	5.000
Q25BXBB-ETA	11,1mm	63mm	Chisel	Galvanised 12m μ	Glued	5.000
Q19BGB-ETA	11,1mm	44mm	Chisel	Stainless 304	Glued	5.000
Q21BGB-ETA	11,1mm	50mm	Chisel	Stainless 304	Glued	5.000
Q25BGB-ETA	11,1mm	63mm	Chisel	Stainless 304	Glued	5.000

NAILS

CONCRETE PINS



TOOLS
GT40i-SCP

0°

Art. Nr.	Diameter	Length	Point	Material	Collation	BX (Box)
STANDARD						
SCP2719	2,7mm	19mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP2722	2,7mm	22mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP2725	2,7mm	25mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP2732	2,7mm	32mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP2738	2,7mm	38mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP3115	3,1mm	15mm	Pinched	Galvanised	Straight Plastic strip	1.000
PREMIUM						
SCP3015P	3mm	15mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP3019P	3mm	19mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP3022P	3mm	22mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP3025P	3mm	25mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP3032P	3mm	32mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP3038P	3mm	38mm	Pinched	Galvanised	Straight Plastic strip	1.000
SCP3040P	3mm	40mm	Pinched	Galvanised	Straight Plastic strip	1.000

NAILS

T-NAILS



TOOLS
TPRO65

0°

Art. Nr.	Diameter	Length	Point	Material	Collation	BX (Box)
PH13AAA	2,2mm	25mm	Diamond	Galvanised	Glued	2.000
PH15AAA	2,2mm	32mm	Diamond	Galvanised	Glued	2.000
PH17AAA	2,2mm	38mm	Diamond	Galvanised	Glued	1.000
PH21AAA	2,2mm	50mm	Diamond	Galvanised	Glued	1.000
PH25AAA	2,2mm	64mm	Diamond	Galvanised	Glued	1.000
PH11AIA	2,2mm	17,5mm	Diamond	Galvanised Hardened	Glued	2.000
PH13AIA	2,2mm	25mm	Diamond	Galvanised Hardened	Glued	2.000
PH15AIA	2,2mm	32mm	Diamond	Galvanised Hardened	Glued	2.000
PH17AIA	2,2mm	38mm	Diamond	Galvanised Hardened	Glued	1.000
PH19AIA	2,2mm	45mm	Diamond	Galvanised Hardened	Glued	1.000
PH21AIA	2,2mm	50mm	Diamond	Galvanised Hardened	Glued	1.000
PH23AIA	2,2mm	57mm	Diamond	Galvanised Hardened	Glued	1.000
PH25AIA	2,2mm	64mm	Diamond	Galvanised Hardened	Glued	1.000

FENCING STAPLES

31 STAPLE



TOOLS
GT40FS

10_{GA}

Art. Nr.	Crown	Length	Point	Material	Collation	BX (Box)
31FS33FAAT	12,2mm	33mm	Divergent	Hot dipped Galvanised	Paper Collated strip	2.700
31FS40FAAT	12,2mm	40mm	Divergent	Hot dipped Galvanised	Paper Collated strip	2.100

REBAR WIRE

REBAR WIRE



TOOLS
SRT40

Art. Nr.	Diameter	Length	BX (Box)
08A40	0,8mm	95m	40


DURASPIN

COLLATED SCREWS



TOOLS
DS525-18V, DS522-18V, DS722-18V,
DS7525-AC, DS5550-AC, DS5525-AC


Art. Nr.	Diameter	Length	Applications	Material	BX (Box)
39A25MP	3,9mm	25mm	Drywall to Wood	Phosphated	1.000
39A30MP	3,9mm	30mm	Drywall to Wood	Phosphated	1.000
39A35MP	3,9mm	35mm	Drywall to Wood	Phosphated	1.000
39A45MP	3,9mm	45mm	Drywall to Wood	Phosphated	1.000
39A50MP	3,9mm	50mm	Drywall to Wood	Phosphated	1.000
39A55MP	3,9mm	55mm	Drywall to Wood	Phosphated	1.000
39B25MP	3,9mm	25mm	Drywall to Light Steel	Phosphated	1.000
39B35MP	3,9mm	35mm	Drywall to Light Steel	Phosphated	1.000
39B45MP	3,9mm	45mm	Drywall to Light Steel	Phosphated	1.000

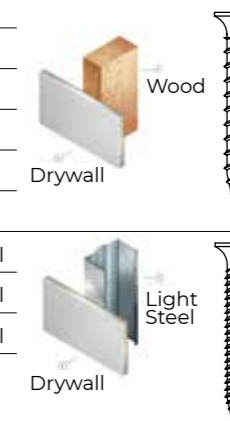



MAKE IT LAST.

CHECK THIS OUT!



Kyocera Senco Europe
Pascallaan 88
8218 NJ Lelystad
The Netherlands

Tel: +31 320 295 575
Fax: +31 320 295 569

FOLLOW US



SENCO.EU